

SERBATOI VERTICALI VERTICAL TANKS

Materiale: acciaio al carbonio

Fluido contenuto: aria/azoto

Finiture standard: grezzo o verniciatura esterna a polvere RAL 5015


Su richiesta: zincatura - verniciatura interna

Material: carbon steel

Fluid content: air/nitrogen


Standard finishes: raw or exterior paint powder RAL 5015

Upon request: galvanized - internal painting

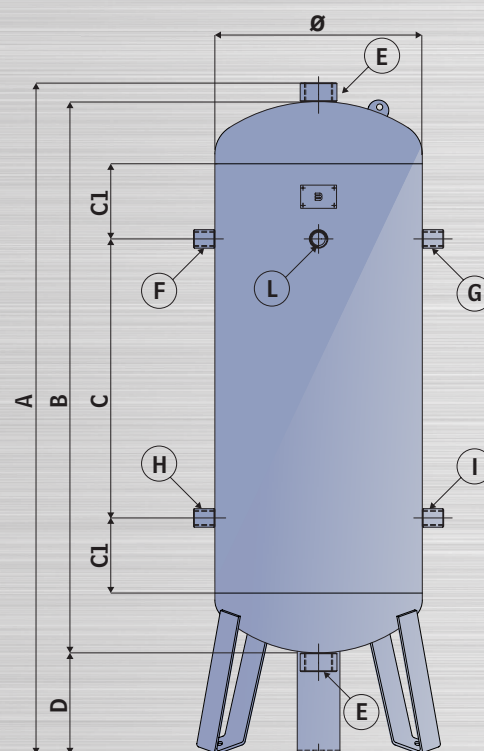

DIRETTIVA - DIRECTIVE	2014/29/UE	2014/68/UE(PED)		*AD 2000	
PRESSIONE ESERCIZIO - ALLOWABLE PRESSURE	11 BAR	11 BAR	15 BAR	11 BAR	15 BAR
TEMPERATURA ESERCIZIO - OPERATING PRESSURE	-10 + 100 C°	-10 + 120 C°		-10 + 120 C°	


CODICE CODE	DIRETTIVA DIRECTIVE	VOLUME CAPACITY	PRESSIONE ESERCIZIO ALLOWABLE PRESSURE	Ø	A	B	C	C1	D	E	F	G	H	I	L
		Lt	Bar	mm	mm	mm	mm	mm	mm	inch	inch	inch	inch	inch	inch
003.06.013.009	2014/29/UE	5	11	150	427	360	130	50	50	1/4"	3/8"	-	-	3/8"	3/8"
003.06.014.006	2014/29/UE	10	11	170	610	500	290	50	140	1/2"	3/8"	-	-	3/8"	3/8"
003.06.016.003	2014/29/UE	15	11	200	678	538	318	50	140	1/2"	3/8"	-	-	3/8"	3/8"
003.06.020.010	2014/29/UE	24	11	214	867	710	390	100	140	1/2"	3/8"	-	-	3/8"	3/8"
003.06.020.011	2014/29/UE	24	11	243	715	580	240	100	118	1/2"	3/8"	-	-	3/8"	3/8"
003.06.003.005	2014/29/UE	50	11	300	898	770	390	100	111	1/2"	1/2"	-	-	1/2"	3/8"
003.06.004.002	2014/29/UE	75	11	500	478	438	38	50	23	1/2"	1/2"	-	-	1/2"	3/8"
003.06.012.004	2014/29/UE	100	11	350	1144	1020	600	100	107	1/2"	1/2"	-	-	1/2"	3/8"
003.06.011.004	2014/29/UE	150	11	400	1417	1250	800	100	150	1/2"	1"	1"	1"	1/2"	3/8"
003.06.023.002	2014/29/UE	200	11	450	1556	1375	795	150	164	1/2"	1"	1"	1"	1/2"	3/8"
003.06.008.003	2014/29/UE	270	11	500	1643	1450	850	150	176	1/2"	1"	1"	1"	1/2"	3/8"
003.06.008.004	2014/29/UE	270	11	600	1272	1080	520	100	170	1"	1"	1"	1"	1/2"	3/8"
003.06.009.005	2014/29/UE	300	11	500	1776	1600	1000	150	176	1/2"	1"	1"	1"	1/2"	3/8"
003.06.028.002	2014/29/UE	470	11	600	1990	1800	1100	200	170	1"	1"	1"	1"	1/2"	3/8"
003.06.010.002	2014/29/UE	500	11	600	2052	1860	1100	200	170	1"	1"	1"	1"	1/2"	3/8"
003.06.037.001	2014/29/UE	725	11	750	2000	1800	1100	130	200	2"	2"	2"	2"	2"	3/8"
003.02.008.003	2014/68/UE*	270	11/15	500	1643	1450	850	150	176	1/2"	1"	1"	1"	1/2"	3/8"
003.02.008.004	2014/68/UE*	270	11/15	600	1272	1080	520	100	170	1"	1"	1"	1"	1/2"	3/8"
003.02.009.001	2014/68/UE*	300	11/15	500	1776	1600	1000	150	176	1/2"	1"	1"	1"	1/2"	3/8"
003.02.028.001	2014/68/UE*	470	11/15	600	1990	1800	1100	200	170	1"	1"	1"	1"	1/2"	3/8"
003.02.010.001	2014/68/UE*	500	11/15	600	2052	1860	1100	200	170	1"	1"	1"	1"	1/2"	3/8"
003.02.037.001	2014/68/UE*	725	11	750	2000	1800	1100	130	200	2"	2"	2"	2"	2"	3/8"

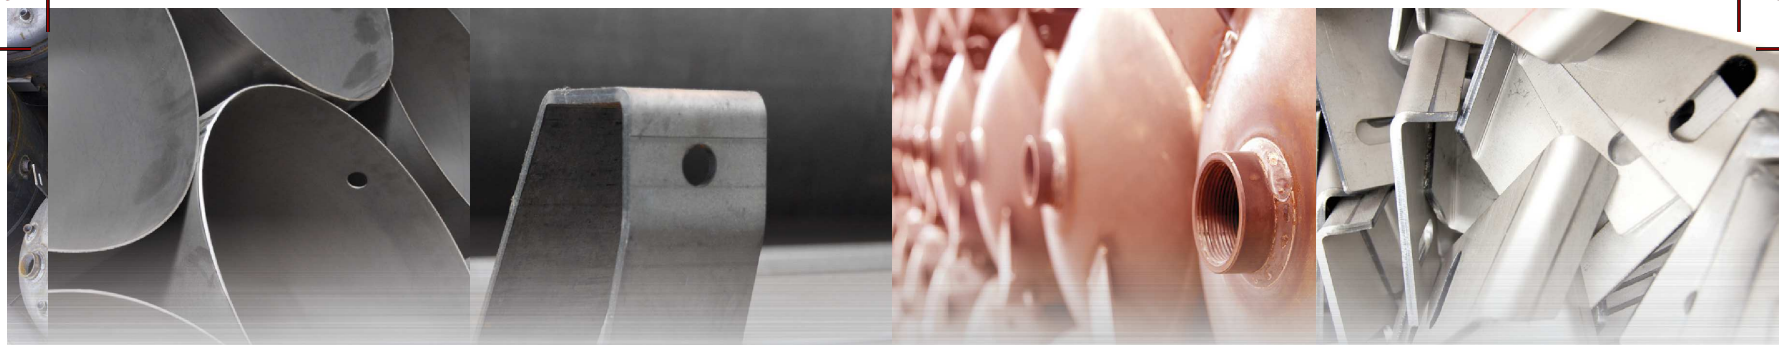


SERBATOI ORIZZONTALI HORIZONTAL TANKS

Materiale: acciaio al carbonio
Fluido contenuto: aria/azoto
Finiture standard: grezzo o verniciatura esterna a polvere RAL 5015
Su richiesta: zincatura - verniciatura interna

Material: carbon steel
Fluid content: air/nitrogen
Standard finishes: raw or exterior paint powder RAL 5015
Upon request: galvanized - internal painting

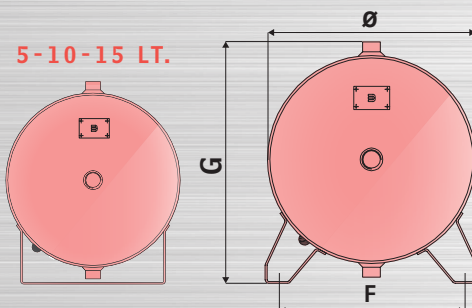

5-10-15 LT.

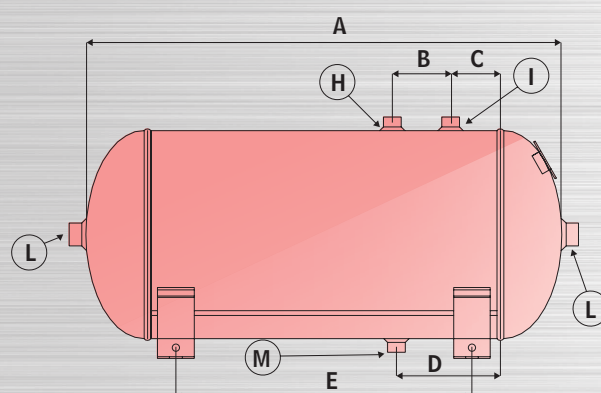

DIRETTIVA - DIRECTIVE	2014/29/UE	2014/68/UE(PED)	*AD 2000
PRESSIONE ESERCIZIO - ALLOWABLE PRESSURE	11 BAR	11 BAR 15 BAR	11 BAR 15 BAR
TEMPERATURA ESERCIZIO - OPERATING PRESSURE	-10+100 C°	-10+120 C°	-10+120 C°


CODICE CODE	DIRETTIVA DIRECTIVE	VOLUME CAPACITY	PRESSIONE ESERCIZIO ALLOWABLE PRESSURE	Ø	A	B	C	D	E	F	G	H	I	L	M
		Lt	Bar	mm	mm	mm	mm	mm	mm	mm	mm	inch	inch	inch	inch
003.06.013.001	2014/29/UE	5	11	150	360	70	50	100	150	90	157	1/4"	1/4"	1/4"	3/8"
003.06.014.001	2014/29/UE	10	11	170	500	70	50	100	300	90	173	3/8"	3/8"	1/2"	3/8"
003.06.016.002	2014/29/UE	15	11	200	538	70	50	100	320	175	240	3/8"	3/8"	1/2"	3/8"
003.06.020.008	2014/29/UE	24	11	214	710	70	50	100	420	185	275	1/2"	3/8"	1/2"	3/8"
003.06.020.009	2014/29/UE	24	11	243	580	70	50	100	320	185	290	1/2"	3/8"	1/2"	3/8"
003.06.002.003	2014/29/UE	30	11	285	513	70	50	100	240	226	340	1/2"	3/8"	1/2"	3/8"
003.06.036.002	2014/29/UE	45	11	350	496	70	50	100	180	226	380	1/2"	3/8"	1/2"	3/8"
003.06.003.001	2014/29/UE	50	11	300	770	70	90	100	450	240	360	1/2"	3/8"	1/2"	3/8"
003.06.012.002	2014/29/UE	100	11	350	1080	70	90	100	560	300	420	3/4"	3/8"	1/2"	3/8"
003.06.011.003	2014/29/UE	150	11	400	1250	70	90	100	650	340	486	3/4"	3/8"	1/2"	3/8"
003.06.023.001	2014/29/UE	200	11	450	1375	70	120	100	750	360	515	3/4"	3/8"	1/2"	3/8"
003.06.008.001	2014/29/UE	270	11	500	1450	70	120	100	895	400	600	1"	3/8"	1/2"	3/8"
003.06.008.002	2014/29/UE	270	11	600	1080	70	120	100	600	470	690	1"	3/8"	1"	3/8"
003.06.009.004	2014/29/UE	300	11	500	1600	70	120	100	975	400	600	1"	3/8"	1/2"	3/8"
003.06.028.001	2014/29/UE	470	11	600	1800	70	120	100	1040	470	690	1"	3/8"	1/2"	3/8"
003.06.010.001	2014/29/UE	500	11	600	1860	70	120	100	1040	470	690	1"	3/8"	1/2"	3/8"
003.01.008.011	2014/68/UE*	270	11/15	500	1450	70	120	100	895	400	600	1"	3/8"	1"	3/8"
003.01.008.012	2014/68/UE*	270	11/15	600	1080	70	120	100	600	470	690	1"	3/8"	1"	3/8"
003.01.009.007	2014/68/UE*	300	11/15	500	1600	70	120	100	975	400	600	1"	3/8"	1"	3/8"
003.01.028.006	2014/68/UE*	470	11/15	600	1800	70	120	100	1040	470	690	1"	3/8"	1"	3/8"
003.01.010.012	2014/68/UE*	500	11/15	600	1860	70	120	100	1040	470	690	1"	3/8"	1"	3/8"



SERBATOI SENZA STAFFE TANKS WITHOUT BRACKETS

Materiale: acciaio al carbonio
Fluido contenuto: aria/azoto
Finiture standard: grezzo o verniciatura esterna a polvere RAL 5015
Su richiesta: zincatura - verniciatura interna

Material: carbon steel
Fluid content: air/nitrogen
Standard finishes: raw or exterior paint powder RAL 5015
Upon request: galvanized - internal painting

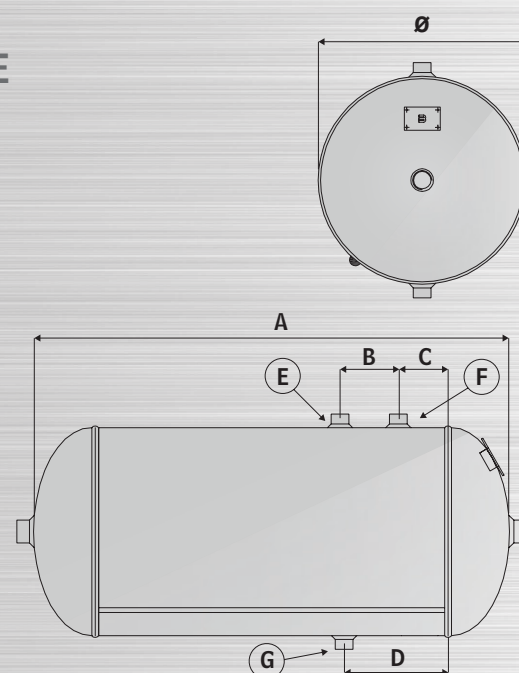

DIRETTIVA - DIRECTIVE	2014/29/UE	2014/68/UE(PED)	*AD 2000
PRESSIONE ESERCIZIO - ALLOWABLE PRESSURE	11 BAR	11 BAR 15 BAR	11 BAR 15 BAR
TEMPERATURA ESERCIZIO - OPERATING PRESSURE	-10+100 C°	-10+120 C°	-10+120 C°

CODICE CODE	DIRETTIVA DIRECTIVE	VOLUME CAPACITY	PRESSIONE ESERCIZIO ALLOWABLE PRESSURE	Ø	A	B	C	D	E	F	G
		Lt	Bar	mm	mm	mm	mm	mm	inch	inch	inch
003.06.013.008	2014/29/UE	5	11	150	360	70	50	100	1/4"	1/4"	3/8"
003.06.014.009	2014/29/UE	10	11	170	500	70	50	100	3/8"	3/8"	3/8"
003.06.016.004	2014/29/UE	15	11	200	538	70	50	100	3/8"	3/8"	3/8"
003.06.020.012	2014/29/UE	24	11	214	710	70	50	100	1/2"	3/8"	3/8"
003.06.020.013	2014/29/UE	24	11	243	580	70	50	100	1/2"	3/8"	3/8"
003.06.002.004	2014/29/UE	30	11	285	513	70	50	100	1/2"	3/8"	3/8"
003.06.036.003	2014/29/UE	45	11	350	496	70	50	100	1/2"	3/8"	3/8"
003.06.003.004	2014/29/UE	50	11	300	770	70	90	100	1/2"	3/8"	3/8"
003.06.012.005	2014/29/UE	100	11	350	1020	70	90	100	3/4"	3/8"	3/8"
003.06.011.004	2014/29/UE	150	11	400	1250	70	90	100	3/4"	3/8"	3/8"
003.06.023.003	2014/29/UE	200	11	450	1375	70	120	100	3/4"	3/8"	3/8"
003.06.008.005	2014/29/UE	270	11	500	1450	70	120	100	1"	3/8"	3/8"
003.06.008.006	2014/29/UE	270	11	600	1080	70	120	100	1"	3/8"	3/8"
003.06.009.006	2014/29/UE	300	11	500	1600	70	120	100	1"	3/8"	3/8"
003.06.028.003	2014/29/UE	470	11	600	1800	70	120	100	1"	3/8"	3/8"
003.06.010.003	2014/29/UE	500	11	600	1860	70	120	100	1"	3/8"	3/8"
003.01.008.013	2014/68/UE*	270	11/15	500	1450	70	120	100	1"	3/8"	3/8"
003.01.008.014	2014/68/UE*	270	11/15	600	1080	70	120	100	1"	3/8"	3/8"
003.01.009.008	2014/68/UE*	300	11/15	500	1600	70	120	100	1"	3/8"	3/8"
003.01.028.007	2014/68/UE*	470	11/15	600	1800	70	120	100	1"	3/8"	3/8"
003.01.010.013	2014/68/UE*	500	11/15	600	1860	70	120	100	1"	3/8"	3/8"